

## WL300R

### Wall Luminaire with Open Faceplate

**Applications:** Recessed Wall Luminaire designed for commercial, architectural, and residential installation. Designed to conform to the architectural requirements for low mounting heights for the illumination of steps, stairways, walkways, aisles, ramps and other indoor and outdoor applications.

**Housing:** Constructed of a one piece high grade die cast aluminum with a powder coat finish. Includes an integral wiring compartment and silicone gasket. One (1) 7/8" diameter hole provided for 1/2" trade size conduit.

**Faceplate:** Round open one-piece high grade die cast aluminum with a high corrosion-resistant powder coat finish and semi-translucent UV stabilized polycarbonate prismatic lens. Faceplate is secured to housing by two (2) tamper resistant, stainless steel screws. Also available with stainless steel faceplate and white tempered glass lens (SS).

#### Electrical:


- LED: (1) 2W, warm white (3000K), CRI: 70, 65lm (N312C). (1) 2W, cool white (6300K), CRI: 70, 80lm (N612C). 120V. Min. start temp. -30°C.
- Low Voltage (12V) Lampholder: T3 (10W) G4. Halogen porcelain bi-pin lampholder with stainless steel contacts and high temperature leads. Available as remote (RMT) only, no step down transformer.

**Finish:** Powder coat. Standard color in black, white, natural finish or stainless steel faceplate (SS). Custom colors available on special order, supply two (2) samples.


**Listing:** UL / ETL Listed, suitable for wet locations and for all types of constructions including poured concrete. ADA compliant and suitable for installation within 4 feet of ground (IP55).

*Specifications Subject to change without notice*

2010.5.7

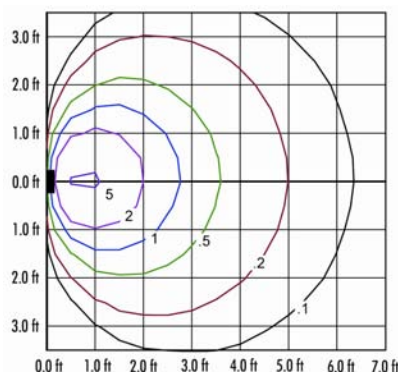

WL300R/BPB/  
 MTG HT : 1 FT  
 MAX. Fc : 5.35 Fc



**REQUIRED WALL RECESSED OPENING:**  
 DIA : 3" Depth: 2 1/4"





5461 West Jefferson Blvd  
Los Angeles, CA 90016

Tel: 1-888-4-LUMEN8  
Fax: 1-888-7-LUMEN8

Project :

Date :

Type :

Approval :

Product # : WL300R/

**ITEM #: WL300R**

ORDERING : WL300R / Lamp / Volt / Finish								
Lamp Description	Lumen	Base	Bulb	Watt	▲	▲	▲	
<i>LED</i>						120	B	Black
(1) 2W Wht, 3100K	65	-	-	(1) 2W	◀ N312C	RMT	N	Natural
(1) 2W Wht, 6300K	80	-	-	(1) 2W	◀ N612C		SS	St.Stl
<i>Halogen</i>							W	White
10W		G4	T3	10W	◀ BPB			

**Codes**

Ⓐ Architects Choice: Most visually appealing fixture based on lamp type.

● Highest Efficacy: Maximum light output per Watt (Lumen/Watt)

RMT - Remote ballast Option (No ballast in fixture)