

WL350R

Wall Luminaire with Half Lid Faceplate

Applications: Recessed Wall Luminaire designed for commercial, architectural, and residential installation. Designed to conform to the architectural requirements for low mounting heights for the illumination of steps, stairways, walkways, aisles, ramps and other indoor and outdoor applications.

Housing: Constructed of a one piece high grade die cast aluminum with a powder coat finish. Includes an integral wiring compartment and silicone gasket. One (1) 7/8" diameter hole provided for 1/2" trade size conduit.

Faceplate: Round half lid one-piece high grade die cast aluminum with a high corrosion-resistant powder coat finish and semi-translucent UV stabilized polycarbonate prismatic lens. Faceplate is secured to housing by two (2) tamper resistant, stainless steel screws.

Electrical:


- LED: (1) 2W, warm white (3000K), CRI: 70, 65lm (N312C). (1) 2W, cool white (6300K), CRI: 70, 80lm (N612C). 120V. Min. start temp. -30°C.
- Low Voltage (12V) Lampholder: T3 (10W) G4. Halogen porcelain bi-pin lampholder with stainless steel contacts and high temperature leads. Available as remote (RMT) only, no step down transformer.

Finish: Powder coat. Standard color in black, white or natural finish. Custom colors available on special order, supply two (2) samples.

Listing: UL / ETL Listed, suitable for wet locations and for all types of constructions including poured concrete. **ADA** compliant and suitable for installation within 4 feet of ground (IP55).

2010.5.7

Specifications Subject to change without notice

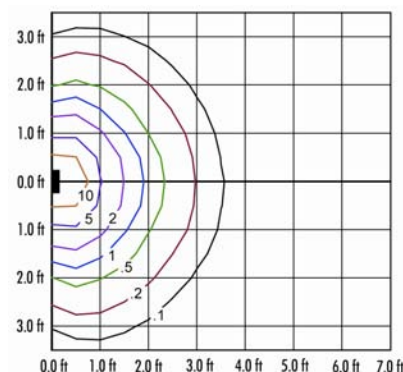

WL350R/BPB/
 MTG HT : 1 FT
 MAX. Fc : 14.93 Fc

20 Fc
10 Fc
5 Fc
2 Fc
1 Fc
.5 Fc
.2 Fc
.1 Fc

REQUIRED WALL RECESSED OPENING:
DIA : 3" Depth: 2 1/4"





5461 West Jefferson Blvd
Los Angeles, CA 90016

Tel: 1-888-4-LUMEN8
Fax: 1-888-7-LUMEN8

Project :

Date :

Type :

Approval :

Product # : WL350R/

ITEM #: WL350R

ORDERING : WL350R / Lamp / Volt / Finish								
Lamp Description	Lumen	Base	Bulb	Watt	▲	▲	▲	
<i>LED</i>						120	B	Black
(1) 2W Wht, 3100K	65	-	-	(1) 2W	◀ N312C	RMT	N	Natural
(1) 2W Wht, 6300K	80	-	-	(1) 2W	◀ N612C		W	White
<i>Halogen</i>								
10W		G4	T3	10W	◀ BPB			

Codes

Ⓐ Architects Choice: Most visually appealing fixture based on lamp type.

⦿ Highest Efficacy: Maximum light output per Watt (Lumen/Watt)

RMT - Remote ballast Option (No ballast in fixture)